

NEMA24(□60mm)2相1.8°-24HSM Series




低振动 Low vibration
低噪音 Low noise
低发热 Low fever
高效率 High efficiency
高响应 High response
高精度 High precision
大力矩 High torque

■ 技术数据 Electrical Specifications

型号 Series Model	电流 Rated Current (A)	电阻 Phase Resistance (Ω)	电感 Phase Inductance (mH)	引线数 Lead Wire (No.)	静力矩 Holding Torque (N.m)	机身长L Motor Length L (mm)	转动惯量 Rotor Inertia (g.cm ²)	重量 Motor Weight (g)	步距角 Step Angle (°)
24HSM4442EG	4.2	0.4	0.7	4	0.9	45	200	550	1.8
24HSM6442EG		0.5	1.4		1.6	54	350	700	
24HSM1456EG	5.5	0.42	1.8		3.0	90	780	1150	
编码器分辨率 (P/R) Encoder Resolution		2500			长线驱动输出 Line Driver Output		3-channel:A+A-B+B-Z+Z-		

*以上仅为代表性产品, 派生产品可根据客户要求制作 *Note: We can manufacture products according to customer's requirements.

■ 外形图 Dimensions(单位Unit: mm)

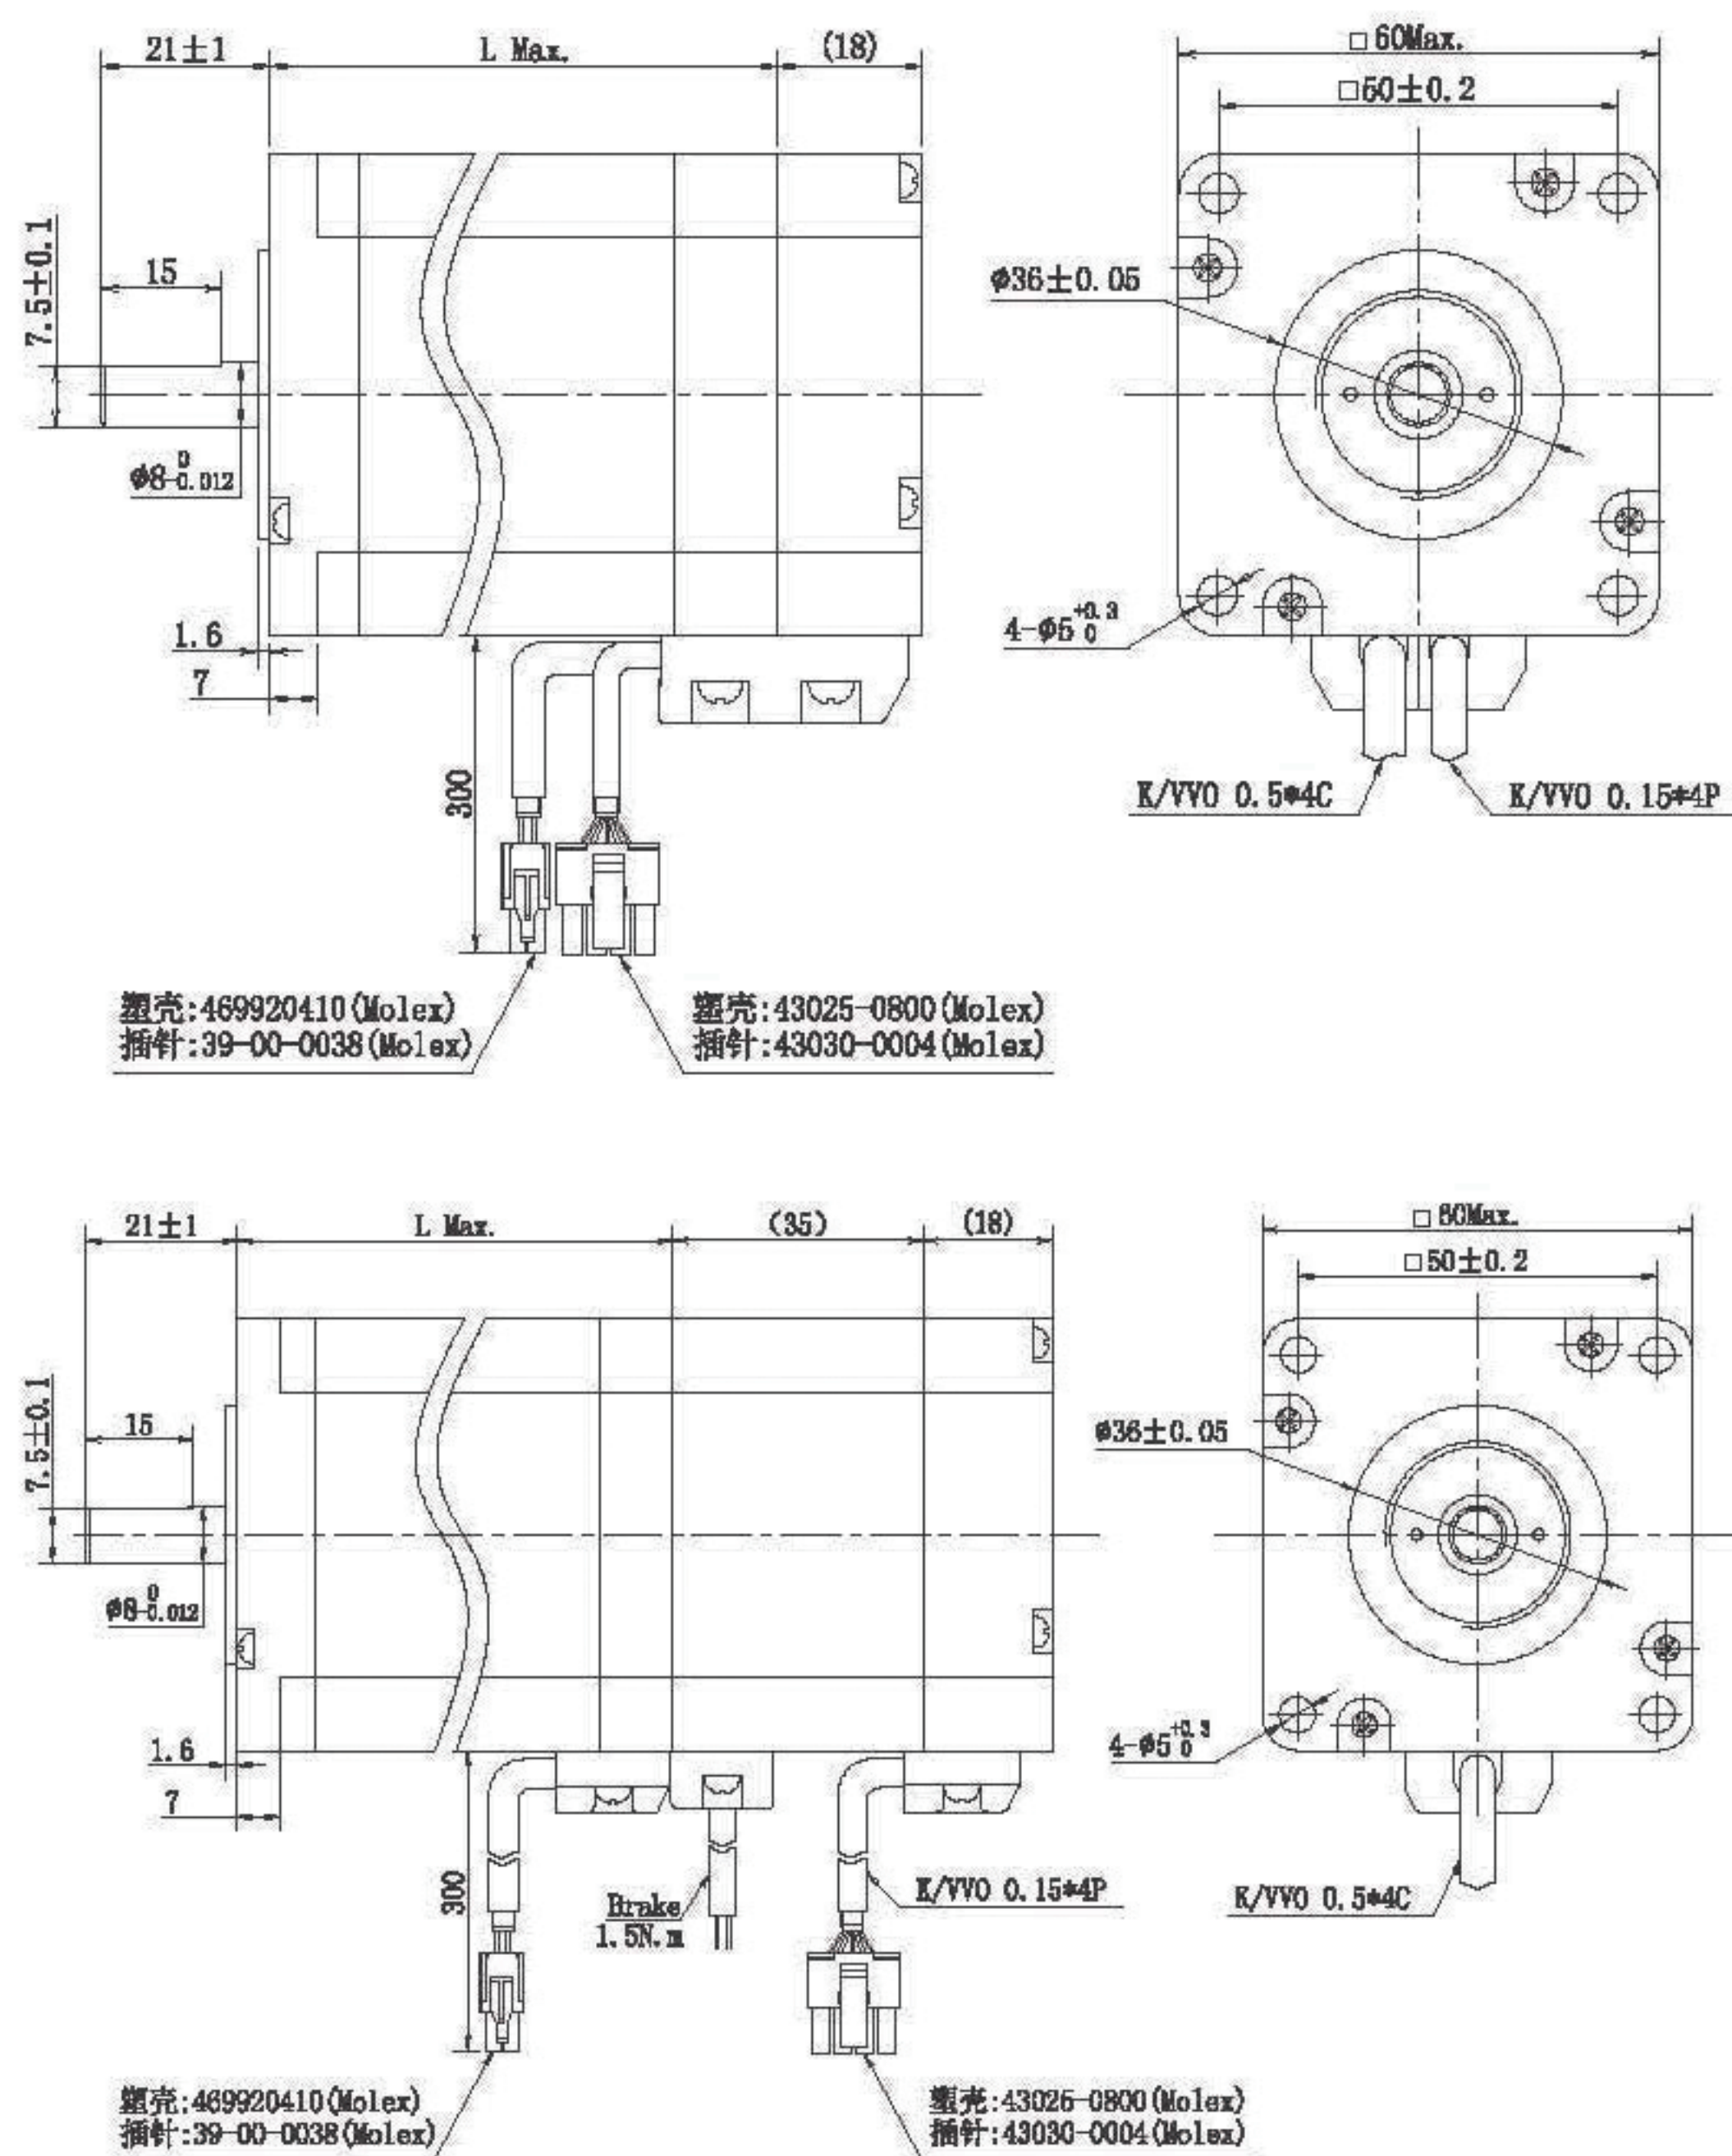

加刹车 ▲